

# Titan Series



## Combination Warmers

Warm your blankets and fluids for busy emergency rooms, operating rooms and labor and delivery units in the convenient, reliable and affordable Titan Series combination warmers. Separate controls ensure that blankets and fluids are safely and accurately heated to recommended temperatures. Improve recovery time by efficiently warming patients from admission to discharge, reducing surgical site infections.

The durable, heavy-duty stainless steel Titan Series combination warmers quickly and efficiently heat blankets and fluids to precise temperatures using the digital control, ensuring your warmed fluids meet healthcare guidelines for IV and irrigation fluids.

**WarmSafe Zone Heating:** Heat is evenly balanced throughout the chamber to provide safe fluid warming.

**Durable:** The affordable, rugged stainless steel (201 & 430) cabinets are made to last and work just as hard as you do.

**Convenient:** Easily switch between a fully functional fluid or blanket warmer by using the TriMode Capability in the top chamber.

**Glass Window:** The glass window allows staff to take an immediate inventory of the amount of warmed fluids and blankets available.

**Service:** Our worldwide support team is dedicated to providing quality equipment. We walk with you every step of the way to maximize your return on investment:

**Made in the USA** with a commitment to quality

**Warranty:** 5-year parts, 1-year labor (US/Canada only)

**An ISO 13485:2016 certified company**

### Standard Features

- Dual chamber with two (2) windowed doors.
- One TriMode chamber allowing for 3 different modes of warming.
- Stainless steel exterior and interior.
- Programmable control with temperature lock feature.
- One (1) adjustable shelf in the bottom compartment.
- EC1350BL can either be mounted to the wall or bolted to the floor
  1. Wall-mount bracket and hardware standard
  2. Floor mount footing standard (hardware excluded) - HCAI-ready (OPM-0562-19)
- EC1850BL ONLY: Four (4) 5" casters with brakes (2 swivel, 2 rigid)

### Blanket Capacity



CAPACITY

42 **EC1350BL**  
**Bottom Chamber:** 24-30;  
**Top Chamber:** 9-12

54 **EC1850BL**  
**Bottom Chamber:** 30-40;  
**Top Chamber:** 10-14

### Fluid Capacity



CAPACITY

56 **EC1350BL**  
**Bottom Chamber:** 32 (1) liter irrigation bottles ;  
 Top Chamber: 24 (1) liter bottles/20 (1) liter bags

62 **EC1850BL**  
**Bottom Chamber:** 32 (1) liter irrigation bottles  
**Top Chamber:** 30 (1) liter bottles/24 (1) liter bags



EC1350BL



EC1850BL

### Temperature

Adjustable temperature range of

32°-71°C (90°-160°F) adjustable blanket mode

32°-40°C (90°-104°F) adjustable injection mode

32°-66°C (90°-150°F) adjustable irrigation mode



TEMPERATURE

Accurate temperature

IRR +0/-1.67°C (-3°F)

INJ +0/-1.10°C (-2°F)

### Configurations (select one of each)

#### Door Assembly

Windowed door (standard)  Solid door

#### Size

13.3 ft<sup>3</sup>  13.3 ft<sup>3</sup> Built-in  
 13.3 ft<sup>3</sup> P/T  18.5 ft<sup>3</sup>

#### Door Swing

Right hinged (standard)  Left hinged

#### Door Lock

No lock (standard)  Manual

#### TempTrak assembly - external transmitter kit 900MHZ

(US/Canada only)

No TempTrak (standard)  TempTrak

#### Electrical

120V 1PH  220V 1PH  230V 1PH

### Accessories (select all that apply)

#### Feet

Foot kit for EC1850BL (5021814)

#### Antimicrobial Handle (one per door required)

Cuverro Antimicrobial Handle (HD-46356)

#### Built-in Trim Kit

Trim kit





#### Seismic Mounting

Special installation requirements apply



HCAI-ready floor mounting (standard on EC1350BL)

Contact factory (EC1850BL)

## Specification

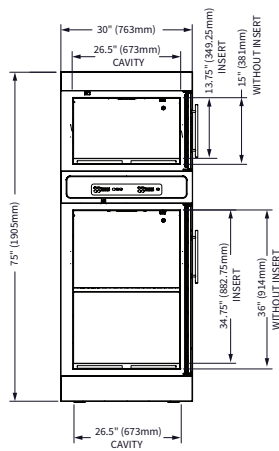

EC-DIM-008782

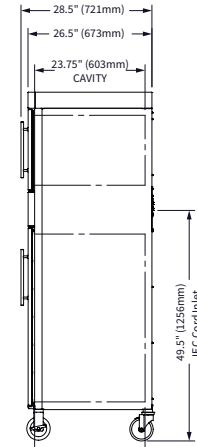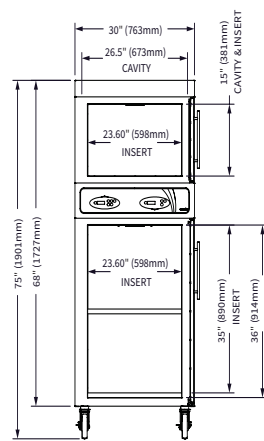

**EC1350BL\***

**Top: 1"**  
**Sides: 1"**  
**Bottom: 1/2"**  
**Back: 2"**

**EC1850BL**

**Top: 1"**  
**Sides: 2"**  
**Bottom: 1/2"**  
**Back: 4"**

\* see manual for built-in requirements



Model	Exterior (H x W x D)	Interior (H x W x D)	Net Weight
EC1350BL	75" (1905mm) x 30" (762mm) x 21.25" (540mm)	51" (1295mm) x 26.5" (673mm) x 17" (432mm)	336lbs (152kg)
EC1850BL	75" (1905mm) x 30" (762mm) x 28.5" (724mm)	51" (1295mm) x 26.5" (673mm) x 23.75" (603mm)	457lbs (207kg)
	Ship Dimensions (L x W x H)*	Ship Weight*	
EC1350BL	38" x 35" x 82"	407 lbs	
EC1850BL	38" x 35" x 82"	528 lbs	



IPX-0

\*Domestic ground shipping information. Contact factory for export weight and dimensions.



	V	Ph	Hz	A	kW	Plug Configuration
<b>EC1350BL</b>	120	1	50/60	10	1.2	NEMA 5-15P; 15A 125V Plug; Hospital Grade
	220	1	50/60	5	1.1	CEE 7/7 220-230V Plug
	230	1	50/60	4.8	1.1	BS 1363 Plug; CEE 7/7 220-230V Plug
<b>EC1850BL</b>	120	1	50/60	11	1.3	NEMA 5-15P; 15A 125V Plug; Hospital Grade
	220	1	50/60	5.5	1.2	CEE 7/7 220-230V Plug
	230	1	50/60	5.6	1.3	BS 1363 Plug; CEE 7/7 220-230V Plug

\*Other international plugs are available, contact the manufacturer for more information.

\*\*Electrical connections must meet all applicable federal, state and local codes.

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
 Phone: 262.251.8356 | 800.862.9276 | Fax: 262.251.7067 | [enthermics.com](http://enthermics.com)