

# EC1540BL

## Combination Warmer



The EC1540BL is designed to safely warm and store blankets and either irrigation fluids or injection fluids.

The dual-chambered warming cabinet is constructed with stainless steel exterior casing and door with handle and hinges designed to withstand heavy usage. The cabinet is warmed using a low-heat-density electrothermal cable array. The electrothermal cable is positioned in the floor and two sides of the warming cabinet, providing even heating of the interior chamber.

**WarmRight:** Provides the right temperature for the right product.

**Durable:** The affordable, rugged stainless steel cabinets are made to last and work just as hard as you do.

**Glass Door:** Energy-efficient coated glass door reflects heat back into the cavity.

**Mobile:** Rugged casters are designed to easily transport warmed fluids and blankets throughout the facility.

**Service:** Our worldwide support team is dedicated to providing quality equipment. We walk with you every step of the way to maximize your return on investment.

**Made in the USA** with a commitment to quality

**Warranty:** 5-year parts/1-year labor (US/Canada only)

**An ISO 13485:2016 certified company**

### Standard Features

- Windowed door
- Organizational fluid baskets
- Epoxy-coated interior surfaces
- Full perimeter bumper
- Programmable control with temperature lock feature
- Timer feature
- Audible over-temp alarm
- Temperature Management Access Point
- Four casters, 2 with brake



**72** 54 (1) liter bottles or 72 (1) liter bags  
**25** 20-25 Blankets

CAPACITY



TEMPERATURE

Adjustable temperature range of  
37°-40°C (98°-104°F) injection mode  
37°-66°C (98°-150°F) irrigation mode  
37°-82°C (98°-180°F) blanket cavity

Accurate temperature

IRR +0/-1.67°C (-3°F)

INJ +0/-1.10°C (-2°F)



### Configurations (select one)

#### Door Assembly

- Window door (standard)     Solid door

#### Door Swing

- Right hinged (standard)     Left hinged

#### Door Lock

- No lock (standard)     Manual lock

#### Electrical

- 120V 1PH     230V 1PH

### Accessories (select all that apply)

#### Legs

- Leg kit, 6" (152mm) (5011149)

#### Seismic Mounting Brackets

Special installation requirements apply

- Contact factory


#### Built in Trim Kit

- Trim Kit

# EC1540BL Combination Warming Cabinet



## Specification

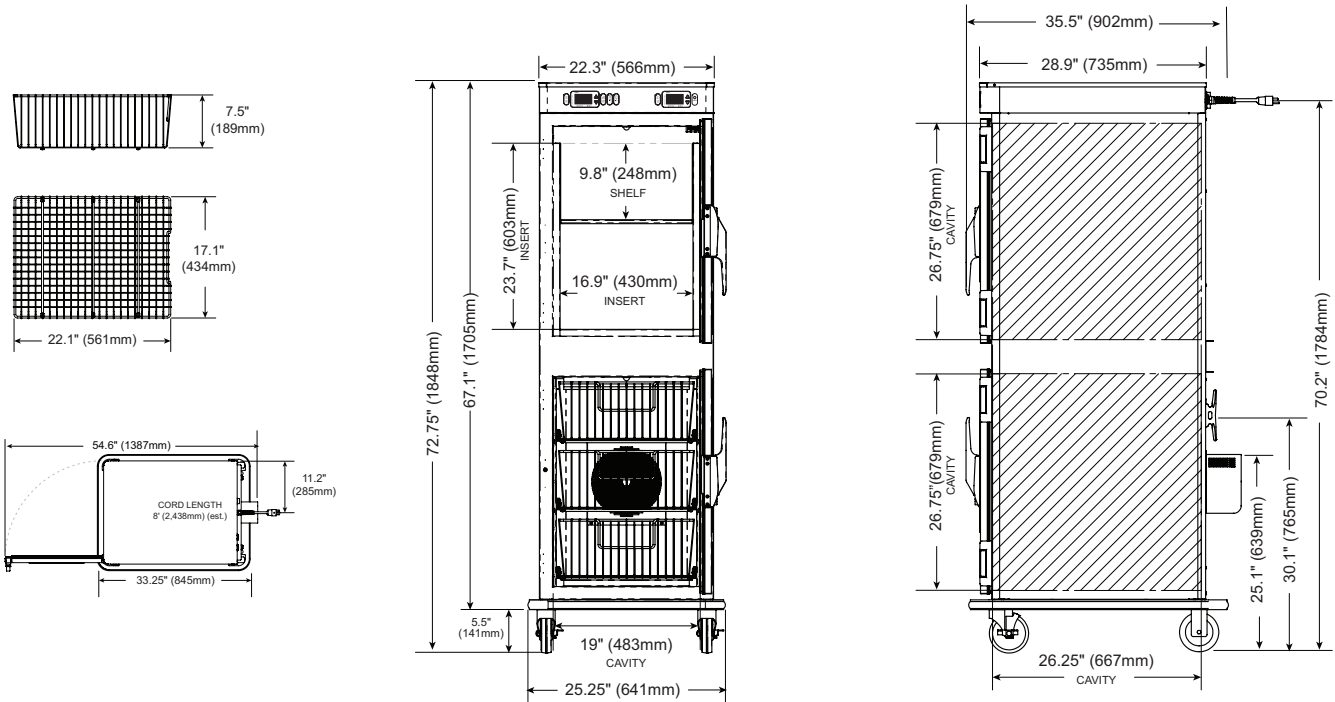

Top: 1"  
Left: 1"  
Right: 1"  
Back: 3"



Model	Exterior (H x W x D)	Interior (H x W x D)	Net Weight
EC1540BL	72.75"(1848mm) x 24"(610mm) x 32.5"(826mm)	53.5"(1359mm) x 19"(483mm) x 26.25"(667mm)	374 lbs (170 kg)

	Ship Dimensions (L x W x H)*	Ship Weight*
EC1540BL	38" x 35" x 80"	494 lbs (224 kg)

\*Domestic ground shipping information. Contact factory for export weight and dimensions.



	V	Ph	Hz	A	kW	Plug Configuration
EC1540BL	120	1	50/60	16	1.92	NEMA 5-20P; 20A 125V Plug; Hospital Grade
	230	1	50/60	7.4	1.7	BS 1363 Plug; CEE 7/7 220-230V Plug

\*Other international plugs are available, contact the manufacturer for more information.

\*\*Electrical connections must meet all applicable federal, state and local codes.

IPX-0

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
Phone: 262.251.8356 | 800.862.9276 | Fax: 262.251.7067 | [enthermics.com](http://enthermics.com)